

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

July 30, 1999

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of **Cao Thans PHAN** and **Lahcen BENNAI**
ROUTING IN A PRIVATE NETWORK WITH COMPRESSION
Our Ref. Q55268

Dear Sir:

Attached hereto is the application identified above including 24 sheets of the specification, claims, 2 sheets of formal drawings, executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney. Also enclosed is the Information Disclosure Statement.

The Government filing fee is calculated as follows:

Total claims	<u>7</u> - 20	=	<u>0</u> x	\$18.00	=	<u>\$0.00</u>
Independent claims	<u>1</u> - 3	=	<u>0</u> x	\$78.00	=	<u>\$0.00</u>
Base Fee						\$760.00
TOTAL FILING FEE						\$760.00
Recordation of Assignment						\$40.00
TOTAL FEE						\$800.00

Checks for the statutory filing fee of \$760.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from August 6, 1998 based on FRENCH Application No. 9810131. The priority document is enclosed herewith.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: David J. Cushing
David J. Cushing
Registration No. 28,703

ROUTING IN A PRIVATE NETWORK WITH COMPRESSION

The present invention concerns a method of routing in a private network in which at least some links employ compression.

5 The invention concerns private telecommunication networks. Such networks are made up of communication nodes interconnected by links carrying calls and/or signaling. It applies equally to private networks made up of dedicated links (physical private networks),
10 virtual private networks and hybrid networks combining these two solutions. In the remainder of the description, the invention is described with reference to one example of a private network with signaling, but it applies more generally to other private networks.

15 BACKGROUND OF THE INVENTION

 In such networks, compressing the signal transmitted on some links is known in itself. This can be the case in particular on links that have only one channel, to enable the routing of a greater number of calls.
20 Compression can have the drawback of causing a loss of quality and, sometimes, of increasing transit time because of the time needed for compression and decompression. A large number of compressions and decompressions can cause echoes and attenuation.

25 Some prior art routing methods are unaware of the number of compressions and decompressions and accept deterioration of call quality if the number is high. In some instances quality is degraded. Other routing methods use a static routing table, in which the number
30 of compressions and decompressions is limited. This solution has limitations and the private network cannot be exploited to the full using that solution. A final solution is to use the configuration facility to limit the number of transit nodes and therefore the number of
35 compressions and decompressions; that solution is not applicable in all private networks and limits their configurations.

The problem of overflow also occurs in private networks, i.e. the problem of a call request that cannot be satisfied by the network because its resources are congested. This can happen if the private links of the private network are of fixed capacity, rather than of a capacity that is allocated dynamically and which is less than the maximum volume of traffic. Completing the corresponding call by way of the public network or some other external network is known in itself. In other words, if a user at a first node of the private network wishes to call a user at a second node, and if at least one link of the private network is congested so the call cannot be completed, the call is completed directly from the first node to the second node via some external network - typically the public network.

This solution gives rise to the following problems. Firstly, using the public network incurs a cost; secondly, it is not certain that there is a public network access circuit group for all the nodes. Moreover, from the economic point of view, that solution is not very cost effective, and it does not exploit the resources of the private network to the full.

OBJECTS AND SUMMARY OF THE INVENTION

The invention proposes a solution to these problems; it manages overflows out of the private network in a way that minimizes the cost of access to the public network and maximizes the use of resources within the private network. It applies not only to overflows to the public network, but more generally to overflows to any type of network external to the private network: public switched network, public land or satellite mobile network, another private network, etc.

The Dijkstra algorithm is described in the literature on algorithms and it calculates the shortest path between two nodes in a graph. The algorithm operates as follows: it considers a graph G with N nodes, and which is valued, i.e. each existing path of the graph

between two nodes i and j is given a value or weight $I(i, j)$. It considers an outgoing node s of the graph G and an incoming node d ; it seeks a path minimizing $\pi(s, d)$, the distance from s to d , i.e. the sum of the values of the connections connecting s to d . S is the subgraph of G made up of the nodes x for which the minimum path to s is known, and \bar{S} is its complement. Γ_i is the set of nodes adjoining a given node i .

Initially the subgraph S contains only the node s , and \bar{S} contains all the other nodes, with the following initial values given thereto:

$\pi(s, i) = I(s, i)$ for $i \in \Gamma_s$, the parent node being s ;

$\pi(s, d) = \infty$, for the other nodes, which have no parent node.

An iteration of the algorithm is effected in the following manner.

If \bar{S} is empty, or if it contains only nodes i with $\pi(s, i) = \infty$, the algorithm has finished.

Otherwise, the node n of \bar{S} is considered which is nearest the source node, i.e. the node which minimizes $\pi(s, i)$, $i \in \bar{S}$; this node is taken from \bar{S} and placed in S .

The nodes adjacent this node n are then considered and the algorithm calculates

$\pi(s, n) + l(n, j)$, $j \in \Gamma_n$ and $j \in \bar{S}$;

If this quantity is less than $\pi(s, j)$, then $\pi(s, j)$ is updated:

$\pi(s, j) := \pi(s, n) + l(n, j)$

and the parent node of j is also updated, which becomes n .

This operation is carried out for all the nodes of Γ_n , after which \bar{S} is reordered.

In this way, all the nodes of the graph are progressively added to S , in order of increasing path length. To find a path to a given node d , the algorithm

can be interrupted before it finishes, once the destination node has been added to the subgraph S .

The validity of the algorithm is demonstrated by the following *reduction ad absurdum* argument. Consider the
 5 node \underline{n} nearest \bar{S} which must be added to S . If there is a nearer path, that path starts from \underline{g} and arrives at \underline{n} and has a first node m in \bar{S} . Then:

$$\pi(s, m) + \pi(m, n) < \pi(s, n)$$

and, since $\pi(m, n)$ is positive or zero:

10 $\pi(s, m) < \pi(s, n)$

which contradicts the hypothesis. It is also clear that $\pi(s, m)$ has been calculated in a preceding iteration, when adding the parent of \underline{m} to S .

The invention proposes a solution to the problem of
 15 routing in private networks using compression of signals on some links, which preserves call quality, combined with good exploitation of the capacities of the network. It also satisfies other constraints and manages overflows to other networks, for example.

20 It is clear that this problem is a serious technical problem and that the claimed method constitutes a technical solution to a technical problem from this point of view, even if it does use an algorithm.

To be more precise, the invention proposes a method
 25 of routing between a source node (\underline{g}) and a destination node (\underline{d}) in a network having nodes interconnected by links, compression being used on at least one of said links, the method comprising at least two routing calculation steps for a given number of compressions, a
 30 routing calculation step for a given number of compressions using information obtained during a routing calculation step for a number of compressions less than said given number.

In one embodiment of the invention the method
 35 comprises choosing a cost function and the routing calculation minimizes the cost function.

A routing calculation step for a given number of compressions advantageously comprises, at a node (n) where the number of compressions from the source node is equal to the given number, seeking and saving for a subsequent calculation step adjacent links on which compression is used.

A routing calculation step for a given number of compressions can use the Dijkstra algorithm and verify the number of compressions when adding a node to the route.

In another embodiment of the invention, the network includes overflow links to an external network and the method comprises at least two routing calculation steps for a given number of overflows and for a given number of compressions, a routing calculation step for a number of overflows and a given number of compressions using information obtained during a routing calculation step for a number of overflows less than said given number of overflows.

In this case the method preferably comprises choosing a cost function representative of the cost of overflows and the routing calculation minimizes the cost function.

The calculation steps are preferably effected for a given number of overflows by varying the number of compressions and then by varying the number of overflows.

BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the invention will become apparent on reading the following description of embodiments of the invention given by way of example and with reference to the accompanying drawings, in which:

- Figure 1 is a diagrammatic representation of the implementation of the method of the invention in a private network with six nodes;
- Figure 2 is a diagrammatic representation of the implementation of the invention in another private network;

comprises the six nodes 1 through 6 and the following links:

- links without compression between nodes 1 and 3, 3 and 2, 2 and 4, 4 and 5, 5 and 6, marked "q" in the figure;
- links with compression between nodes 1 and 2, and 2 and 6, marked "q_c" in the figure.

In the example described with reference to Figure 1, the aim is to find a route between the source node 1 and the destination node 6 with a maximum number NVcompMax of compressions and decompressions equal to 2. Intuitively, the solution is a route via node 2, with only one compression and decompression at node 6; as explained above, there is no decompression at node 2.

To obtain the solution, the invention proposes to apply the Dijkstra shorter path calculation algorithm with modifications to satisfy the constraints on the number of compressions and decompressions. It proposes to apply the algorithm to seek successively shorter paths for given numbers of compressions and decompressions. In the Figure 1 example, the first step is to look for shorter paths with no compression, as symbolized in Figure 1 by the plane P(0); the algorithm next seeks shorter paths with compression in the plane P(1) and then shorter paths with two compressions and decompressions in the plane P(2). The distance between the node s and the node n in a route with at most y compressions and decompressions is denoted $\pi_y(s, n)$ hereinafter.

In Figure 1, the method is applied in the following manner. In the plane P(0), the algorithm considers routes without compression or decompression and calculates:

$$\begin{aligned}
 \pi_0(1, 3) &= 1 \\
 \pi_0(1, 2) &= 2, \\
 \pi_0(1, 4) &= 3, \\
 \pi_0(1, 5) &= 4, \\
 \pi_0(1, 6) &= 5,
 \end{aligned}$$

the shorter paths being shown in bold in Figure 1.

In the plane $P(1)$, it considers routes with compression and calculates:

- 5 $\pi_1(1, 2) = 1$, using the link between 1 and 2,
 $\pi_1(1, 6) = 2$, using the link between 1 and 2 and
 then the link between 2 and 6 without decompression at
 node 2.

In the plane $P(2)$, it considers routes with two compressions or decompressions and calculates:

- 10 $\pi_2(1, 4) = 2$, using the link between 1 and 2, with
 one compression and one decompression;

$\pi_2(1, 5) = 3$, using the link between 1 and 2 and
 then the link between 2 and 6 without decompression at
 node 2 but with decompression at node 6.

- 15 The invention advantageously proposes using a step
 of calculating the shortest path used for a node in the
 preceding calculation step. Accordingly, still referring
 to Figure 1, in the calculation in plane $P(1)$, the
 algorithm can exploit the fact that:

- 20 - the link between node 1 and node 2 involves
 compression, and
 - $\pi_0(1, 2) = 2$ and the link between node 2 and node
 6 involves compression,

- these two facts being determined during the shorter
 25 path calculation in the plane $P(0)$. In other words, in
 the plane $P(0)$, at a node \underline{n} , on reaching a link on which
 compression is possible, the distance $\pi_0(s, n)$ between the
 source node and the node \underline{n} is noted and used in the
 calculation in the higher plane. This is symbolized, in
 30 Figure 1, by the dashed lines between the planes $P(0)$ and
 $P(1)$.

In this way, $\pi_1(1, 2)$ and $\pi_1(1, 6)$ can be calculated
 directly in plane $P(1)$.

- 35 Similarly, the dashed lines between planes $P(1)$ and
 $P(2)$ indicate that the results obtained in the
 calculations in plane $P(1)$ can be used in plane $P(2)$.

The Dijkstra algorithm or a similar shorter path calculation algorithm can be used for the calculations in each plane. In this case, during an iteration of the Dijkstra algorithm, when testing the adjoining nodes, the algorithm can verify if the maximum number of compressions is complied with. If so, the distance can be updated in a higher plane.

In the Figure 1 example, in the plane $P(2)$, recalculating the route with one compression from node 1 to node 6 via node 2 is avoided. At node 6 in plane $P(1)$, $\pi_2(1,5)$ is updated by determining that decompression is needed to use the link between 6 and 5. Likewise, at node 2 in plane $P(1)$, $\pi_2(1,4)$ is updated by determining that decompression is needed to use the link between 2 and 4.

In a plane, if no shorter paths are found, or if no forward progress is possible, the given number of compressions is increased to move to a higher plane.

This embodiment of the invention amounts to seeking successive paths involving a given number of compressions and decompressions and updating the distances in the higher planes on each change in the number of compressions or decompressions. The best path - if there is one - is

$$\pi^*(s,d) = \min_{v=1}^{NVCompMax} (\pi_v(s,d))$$

The best path is therefore calculated with a number of compressions and decompressions less than the maximum number $NVCompMax$. The path is determined by moving backwards through the parent nodes from the destination node \underline{d} and counting the number of compressions and decompressions.

The algorithm seeks the predecessor of \underline{d} in the plane $P(h)$, i.e. $\phi_h(d)$, where \underline{h} is the value of \underline{v} for which the minimum $\pi^*(s,d)$ is reached. For any node \underline{j} on the route from \underline{s} to \underline{d} reached with \underline{k} compressions and

Figure 2 shows another embodiment of the invention. The Figure 2 example takes account not only of the problem of compression but also the problem of overflows to an external network. In this case, the invention
 5 limits the number of compressions and decompressions and also limits the number of overflows to an external network. This maintains the grade of service and limits call setup time.

Figure 2 shows an example of a private network with
 10 four nodes numbered 1 to 4, signaling links between nodes 1 and 2, 3 and 4, and a link without compression between nodes 2 and 3. Also, overflows are possible through an external network:

- between nodes 1 and 2, with a charge of 1;
- 15 • between nodes 1 and 4, with a charge of 3;
- between nodes 3 and 4, with a charge of 1.

This example seeks a route between node 1 and node 4 which has at most two overflows $N_{\text{overflowMax}}$ and which minimizes the sum of the charges. The example does not
 20 consider compressions, but the invention also applies when compression is present, as shown by the embodiment described with reference to Figure 3.

Intuitively, the solution is a route with one overflow between nodes 1 and 2, via the private network
 25 between nodes 2 and 3, and with another overflow between nodes 3 and 4.

To obtain this solution, the invention proposes to use the Dijkstra shorter path calculation algorithm with modifications to satisfy the constraints on the number of
 30 overflows. It proposes to apply the algorithm to seek successively shorter paths for given number of overflows. In the Figure 1 example, the first step is to look for shorter paths with no overflow, as symbolized by the plane $P(0)$ in the lower part of Figure 1; next the
 35 algorithm seeks a shorter path having at most one overflow in the plane $P(1)$, and then a shorter path having two overflows in the plane $P(2)$. Hereinafter,

$\pi_v(s, n)$ denotes the total charge incurred between node \underline{s} and node \underline{n} , which is infinite if the node cannot be reached.

The Figure 2 application uses the method in the following manner. In plane $P(0)$, the algorithm considers routes without overflow and the following are calculated:

$$\pi_0(1, 2) = \infty;$$

$$\pi_0(1, 3) = \infty;$$

$$\pi_0(1, 4) = \infty;$$

since it is impossible to reach any node of the network without overflow.

In plane $P(1)$, the routes with compression are considered and the following are calculated:

$$\pi_1(1, 2) = 1 \text{ with overflow between 1 and 2;}$$

$\pi_1(1, 3) = 1$ with overflow between 1 and 2 and then via the link between 2 and 3;

$$\pi_1(1, 4) = 3 \text{ with overflow between 1 and 4.}$$

In plane $P(2)$, the routes with two overflows are considered and $\pi_2(1, 4) = 2$, is calculated, with overflow between 1 and 2 and then between 3 and 4.

As above, the invention proposes to use a step of calculating the shortest path used for a node in the preceding calculation step. Accordingly, referring to Figure 2, in the calculation in the plane $P(1)$, it is possible to exploit:

- the fact that an overflow is possible between node 1 and node 2, and

- the fact that an overflow is possible between node 1 and node 4,

these two facts being determined during the shorter path calculation in the plane $P(0)$ when examining the nodes neighboring node 1, indicating that nodes 2 and 4 can be reached only with an overflow. More generally, in the plane $P(0)$, on reaching a node \underline{n} with one possible overflow, the information is saved for the calculation in the higher plane. This is symbolized in Figure 1 by the dashed lines between the planes $P(0)$ and $P(1)$. $\pi_1(1, 2)$

and $\pi_1(1, 4)$ can therefore be calculated directly in plane P(1).

Similarly, the dashed line between planes P(1) and P(2) indicates that the result obtained from the calculations in plane P(1) can be used in plane P(2), i.e. on reaching node 3, node 4 cannot be reached because of the constraint on the number of overflows, but this node can be reached with two overflows.

The method described with reference to Figure 1 can be used for the calculations, mutatis mutandis. The method described below with reference to Figure 3, and in the appendix, can also be used with advantage; the algorithm from the appendix can be simplified to take account only of overflows or only of compressions.

The invention is described with reference to Figure 2 in the situation of a cost calculated as the sum of the charge incurred for each overflow. Another form of calculating the cost of the overflow can be considered, for example the cost described in the patent application filed by the applicant under the title "Routing of calls with overflow in a private network". This cost takes account not only of charges incurred because of overflows but also of occupancy of resources in the network; of two routes, the preferred one is the one with the lower sum of charges and, if the charges are the same, the route which makes best use of the resources of the network.

Figure 3 shows a further embodiment of the invention in another private network. The Figure 3 example considers both a limitation on the number of compressions and decompressions and a limitation on the number of overflows.

The Figure 3 network comprises four nodes numbered 1 to 4 and links with a multiplexer between nodes 1 and 2, 2 and 3, 3 and 4. As explained above, a link with multiplexing entails compression and decompression. To simplify the description of the figure, and because it is not possible to have only one compression, the

093364308 "B73059"

compressions and the decompressions are not counted, but rather the number of passes in a link with a multiplexer; this amounts to counting the compressions and decompressions 2 by 2; accordingly, plane $P(0, 1)$

- 5 corresponds not to a compression but to a link with a multiplexer, i.e. in fact a compression and a decompression.

An overflow is possible between nodes 1 and 4, with a charge of 1. The example seeks a route between the
 10 source node 1 and the destination node 4 with a maximum number $N_{vcompMax}$ of passes in a multiplexed link equal to 2 and a maximum number $N_{overflowMax}$ of overflows equal to 2. A route is sought which minimizes the cost $\pi_{h,v}(s, i)$ of the overflows, i.e. the total charge incurred because
 15 of the overflows. Intuitively, the solution is a route with direct overflow between nodes 1 and 4. $Overflow_{h,v}(s, n)$ is the minimum number of overflows between \underline{s} and \underline{n} .

To obtain the solution, the invention proposes to
 20 apply the Dijkstra algorithm to seek successively shorter paths for given numbers \underline{v} of passes in a multiplexed link, on the one hand, and \underline{h} of overflows, on the other hand. The Figure 1 example begins by seeking shorter paths with no compression ($v=0$) and no overflow ($h=0$), as
 25 shown symbolically in the lower part of Figure 1 by the plane $P(h=0, v=0)$; the algorithm then seeks shorter paths having a compression and no overflow in plane $P(0, 1)$, followed by shorter paths having two compressions and decompressions and no overflow in plane $P(0, 2)$.
 30 Finally, paths with one overflow and no compression are sought in plane $P(1, 0)$, which provides a solution. As in Figure 2, $\pi_{h,v}(s, n)$ is the pair formed of the number of overflows and the total charge incurred between node \underline{s} and node \underline{n} in a route with \underline{v} compressions and
 35 decompressions and \underline{h} overflows.

In plane $P(0, 0)$, routes with no compression or overflow are considered and the algorithm determines that

there is no route without compression or overflow. By testing the neighbors of node 1, it is found that node 2 can be reached with one compression and node 4 can be reached with one overflow. This leads to updating of the distances in the planes $P(0, 1)$ and $P(1, 0)$, as shown in dashed line in the figure.

In plane $P(0, 1)$, routes with one compression and without overflow are considered and the algorithm determines that $\pi_{0,1}(1, 2)$ has the value 0 and that other nodes cannot be reached. On examining the neighbors of node 2, it finds that node 3 can be reached with two compressions and the corresponding distance is updated in the plane $P(0, 2)$, as shown by the dashed line between planes $P(0, 1)$ and $P(0, 2)$.

In plane $P(0, 2)$, it considers routes with two compressions and no overflow and finds that $\pi_{0,2}(1, 3)$ has the value 0 and that node 4 cannot be reached.

In plane $P(1, 0)$, it determines that node 4 can be reached with one overflow and that $\pi_{1,0}(1, 4)$ has the value 1.

This example seeks to minimize the number of overflows and the algorithm therefore stops as soon as the destination node has been reached in a plane. If the destination node is reached for a given number h_0 of overflows, the algorithm can continue with the calculations for the various values of y and consider the path which has a minimum distance for all possible values of y with $h^2 h_0$.

The appendix at the end of this description shows one method of carrying out the calculations for a network of the type shown in Figure 3. In this embodiment of the invention, the Dijkstra algorithm again handles the shorter path calculations in each plane.

In the example set out in the appendix, the value of the number of overflow is scanned from 0 to $N_{\text{OverflowMax}}$ and, for each value, the values of the number y of compressions and decompressions are scanned from 0 to

NVCompmax. The calculation is then done in each plane $P(h, v)$ in succession.

In each plane, the calculation begins with an initialization. If \underline{h} and \underline{v} are zero, in other words in the $P(0, 0)$ plane, initialization is as follows: for all nodes other than the source node, the value of $\pi_{h,v}(s, n)$ is initialized to infinity; for any node of the network, $\phi_{h,v}(n)$ has a NULL value in the plane $P(h, v)$, i.e. no node has a predecessor in the tree of shorter paths. For $h = 0$ and $v = 0$, for nodes neighboring \underline{s} , $\pi_{0,0}(s, n)$ is initialized to the corresponding value of the function ReadCost; this function estimates the cost of passage between two neighboring nodes on the link connecting them or on an overflow link connecting them.

All nodes \underline{n} other than the source node are then put in \bar{S} , with a distance $\pi_{0,0}(s, n)$. The function VerifConsistency($l(s, n)$, $h=0$, $v=0$, s, n) then carries out a consistency check. This function checks the compatibility of the qualities of the current plane and prepares the cost for the next plane. In plane $P(0, 0)$, it verifies the consistency between \underline{s} and \underline{n} , in other words it verifies that routing between \underline{s} and \underline{n} is possible.

For values of \underline{h} and \underline{v} that are not both zero, i.e. in planes other than $P(0,0)$, initialization is as follows: the set \bar{S} is emptied and points are put in it for which the number of overflows is greater than or equal to the current value of \underline{h} . This corresponds to the following approach:

- if a node \underline{n} has already been reached in a number of overflows less than \underline{h} , i.e. if there is a path between the source node \underline{s} and the node \underline{n} with at least \underline{h} overflows, the node cannot be brought closer to the source node by passing through a node with a number of overflows greater than or equal to \underline{h} . It is therefore not necessary to put node \underline{n} into \bar{S} . This corresponds to a choice of optimization in this embodiment of the

invention, for which the number of overflows is minimized, even at the cost of an additional compression;

• if node \underline{n} has already been reached in a number of overflows equal to \underline{h} , i.e. if there is a path between the source node \underline{s} and node \underline{n} with \underline{h} overflows, node \underline{n} can serve as a transit node to reach other nodes with \underline{h} overflows; it can also move towards the root, subject to an additional compression or decompression; node \underline{n} is then put in \bar{S} ;

• if node \underline{n} has already been reached in a number of overflows greater than \underline{h} , i.e. if there is a path between the source node \underline{s} and node \underline{n} with more than \underline{h} overflows, or if there is no path between \underline{s} and \underline{n} , node \underline{n} can be brought close to the source node; it is then put in \bar{S} .

Accordingly, after initialization in the plane $P(h, v)$, all the nodes not yet reached or reached by routes with \underline{h} or more overflows are in \bar{S} .

After initialization, paths are calculated in the plane $P(h, v)$. A calculation is performed in each plane using the Dijkstra algorithm, updating the values of $\pi_{h,v}$ in the higher planes, if no further progress is possible that conforms to the constraints on \underline{h} and \underline{v} .

Node \underline{n} of \bar{S} which minimizes the charge $\pi_{h,v}(s, i)$ is therefore considered. Thereafter the process is as in the Dijkstra algorithm; however, when the neighbors of \underline{n} are considered, a verification is performed to determine if compression is necessary to move towards point \underline{n} , or if decompression is necessary, as in the Figure 1 example. The distance values in plane $P(h, v+1)$ are updated in a corresponding manner.

Furthermore, when a point in the vicinity cannot be reached except with an overflow, the corresponding distance value is updated in plane $P(h+1)$. In this plane, a verification is performed as previously to determine if compression or decompression is necessary; the compression and decompression constraints can also apply to an overflow link.

In one embodiment, if there is a link without compression supporting the overflow, the overflow is authorized only if the link is congested; this amounts to optimizing the resources of the private network before
 5 authorizing the overflow; a similar result could be obtained with a distance π taking account of the use of the resources of the network, as explained in the Applicants' aforementioned patent application.

After processing the various planes, at least until
 10 a route reaching the destination node is found, the route is found as explained with reference to Figure 1.

In the Figure 3 example, limiting overflow charges is given preference over the number of compressions and decompressions. This is reflected in the path through
 15 the calculation planes - starting by saturating the constraint on the number of compressions and decompressions before envisaging an overflow. Of course, the invention also functions in the contrary case, or more generally with any form of scanning the various
 20 possible planes. Using the notation \underline{h} and \underline{v} employed above, the invention scans the pairs (h, v) , with $h^2 \text{NVCompmax}$ and $v^2 \text{NOverflowMax}$. The process can be as described, scanning the values of \underline{v} with constant \underline{h} and then with increasing \underline{h} ; the values of \underline{h} could also be
 25 scanned at constant \underline{v} , after which \underline{v} is increased. The calculations could also be done at constant $h+v$, or any other solution could be used. In particular, applying the algorithm in the appendix with $v = 0$ provides a solution for the Figure 1 calculation.

30 The invention is not limited to the embodiments described; it applies more generally in any private network for calculating routes minimizing one or more charges and satisfying one or more constraints on a maximum value; in the Figure 1 example, the distance is
 35 minimized in terms of the number of links and the constraint is a constraint on the number of compressions and decompressions. In the Figure 2 example, an overflow

650270 " 073099

cost is minimized and the constraint is a constraint on the number of overflows. In the Figure 3 example, the aim is to minimize the overflow charges and to conform to constraints on the number of compressions and

- 5 decompressions and the number of overflows. Thus the invention can be applied to separate constraints and to varied cost functions.

It would also be possible to eliminate the step of determining the minimum number of compressions or
10 decompressions; the only consequence of this would be a longer calculation, where necessary, or unnecessary scanning of unsatisfactory solutions.

In the preferred embodiments, the number of compressions and decompressions is counted. It is clear
15 that only the number of compressions could be counted, or only the number of decompressions, likewise to limit the total number of compressions and decompressions. This is based on the generally applicable rule that a decompression necessarily follows an earlier compression.
20 Note that this rule is not always valid if there is more than one type of compression.

The invention applies also to network types different from those described in the preferred embodiments.

25 Finally, the description and the claims mention the Dijkstra algorithm. It is to be understood that this term covers not only the version of the shorter path algorithm proposed by Dijkstra, but also similar versions, and in particular the Bellman algorithm or the
30 Floyd algorithm. Note that the Bellman algorithm applies only for graphs without circuits.

09364306 "073099

Appendix

```

For h = 0 to NOverflowMax do
For v = 0 to NVcompmax do
5 If v = 0 and h = 0
  Then
     $\forall (h, v, n), \pi_{h,v}(s, n) = \infty$  and  $\phi_{h,v}(n)$  NULL
     $\forall n \in \Gamma_s, \pi_{0,0}(s, n) = \text{ReadCost}(l(s, n), h=0, v=0)$ 
    PutInHeap( $\pi_{0,0}(s, n), \bar{S}$ )
10    VerifConsistency( $l(s, n), h=0, v=0, s, n$ )
  If not  $\bar{S} = \emptyset$ 
     $\forall n$  If Overflow( $s, n$ )  $\neq h$ 
      Then
15        If v = 0 PutInHeap( $\pi_{h,0}(s, n), \bar{S}$ )
        If not PutInHeap( $\text{Min}[\pi_{h,v}(s, n), \pi_{h,v-1}(s, n)], \bar{S}$ )
        End if
      End if
    End if
  While  $\bar{S} \neq \emptyset$  or  $\text{Min } \bar{S} < \infty$ , do
20    Consider n such that  $\pi_{h,v}(s, n) = \text{Min}\{\pi_{h,v}(s, i), i \in \bar{S}\}$ 
    Put ( $n, \pi_{h,v}(s, n)$ ) in S and remove n from  $\bar{S}$ 
    For p  $\in \Gamma_n$  and p  $\in \bar{S}$ 
      c = ReadCost( $l(n, p), h, v$ )
25      If  $\pi_{h,v}(s, p) > \pi_{h,v}(s, n) + c$  Then
         $\pi_{h,v}(s, p) := \pi_{h,v}(s, n) + c$ 
         $\phi_{h,v}(p) := n$ 
      End if
      UpdateHeap( $\pi_{h,v}(s, p), \bar{S}$ )
30      If CompressionIsNecessary
      Then
         $\pi_{h,v+1}(s, p) := \text{Min}(\pi_{h,v+1}(s, p); \pi_{h,v}(s, n) + c)$ 
        If new  $\pi_{h,v+1}(s, p)$ 
        Then
35           $\phi_{h,v+1}(p) = n$ 
        End if
      End if
      If DecompressionIsNecessary
         $\pi_{h,v+1}(s, p) := \text{Min}(\pi_{h,v+1}(s, p); \pi_{h,v}(s, n) + c)$ 
40        If new  $\pi_{h,v+1}(s, p)$ 
        Then
           $\phi_{h,v+1}(p) = n$ 
        End if
      End if
    If TheLinkCannotBeUsed
45      c = ReadCost(overflowlink( $n, p$ ), h, v)
      If  $\pi_{h+1,v}(s, p) > \pi_{h+1,v}(s, n) + c$  Then
         $\pi_{h+1,v}(s, p) := \pi_{h+1,v}(s, n) + c$ 
         $\phi_{h+1,v}(p) := n$ 
50      End if

```


CLAIMS

- 1.- A method of routing between a source node and a destination node in a network having nodes connected by links, compression being used on at least one of said
5 links, the method comprising at least two routing calculation steps for a given number of compressions, a routing calculation step for a given number of compressions using information obtained during a routing calculation step for a number of compressions less than
10 said given number.
- 2.- A method according to claim 1, comprising choosing a cost function and wherein the routing calculation minimizes the cost function.
15
- 3.- A method according to claim 1, wherein a routing calculation step for a given number of compressions comprises, at a node where the number of compressions from the source node is equal to the given number,
20 seeking and saving for a subsequent calculation step adjacent links on which compression is used.
- 4.- A method according to claim 1, wherein a routing calculation step for a given number of compressions uses
25 the Dijkstra algorithm and verifies the number of compressions when adding a node to the route.
- 5.- A method according to claim 1, wherein the network further comprises overflow links to an external network
30 and wherein the method comprises at least two routing calculation steps for a given number of overflows and for a given number of compressions, a routing calculation step for a number of overflows and a given number of compressions using information obtained during a routing
35 calculation step for a number of overflows less than said given number of overflows.

"073099" 20050505

6.- A method according to claim 5, comprising choosing a cost function representative of the cost of overflows and wherein the routing calculation minimizes the cost function.



5


7.- A method according to claim 5, wherein the calculation steps are effected for a given number of overflows by varying the number of compressions and then by varying the number of overflows.

09364303 "0730399

[illegible]

5
10
15
20

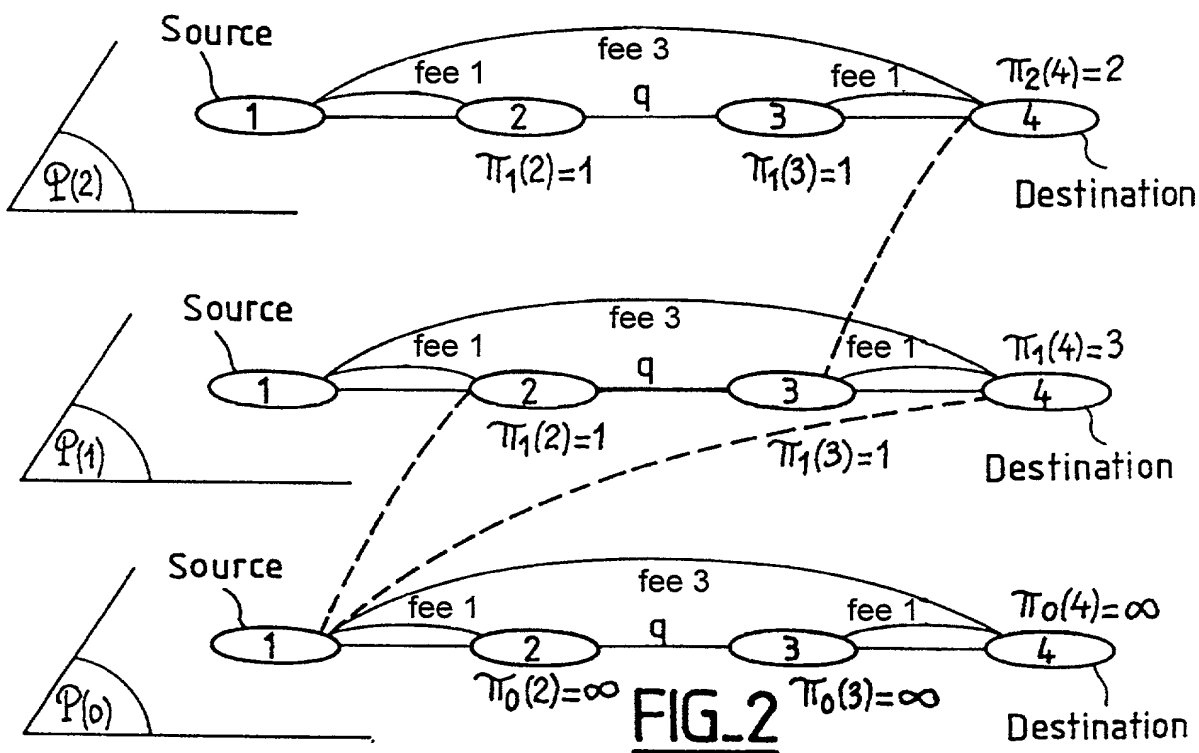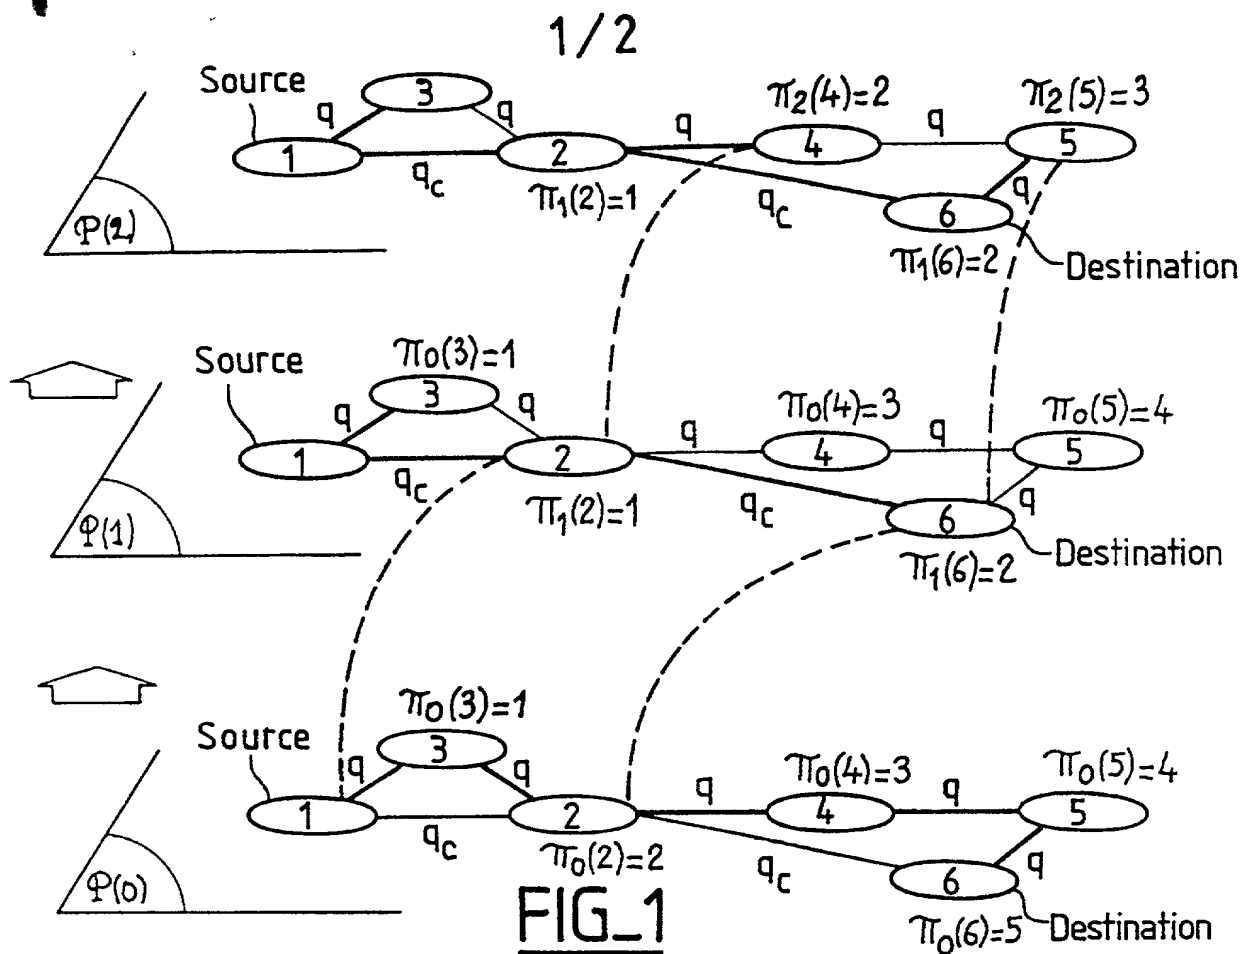

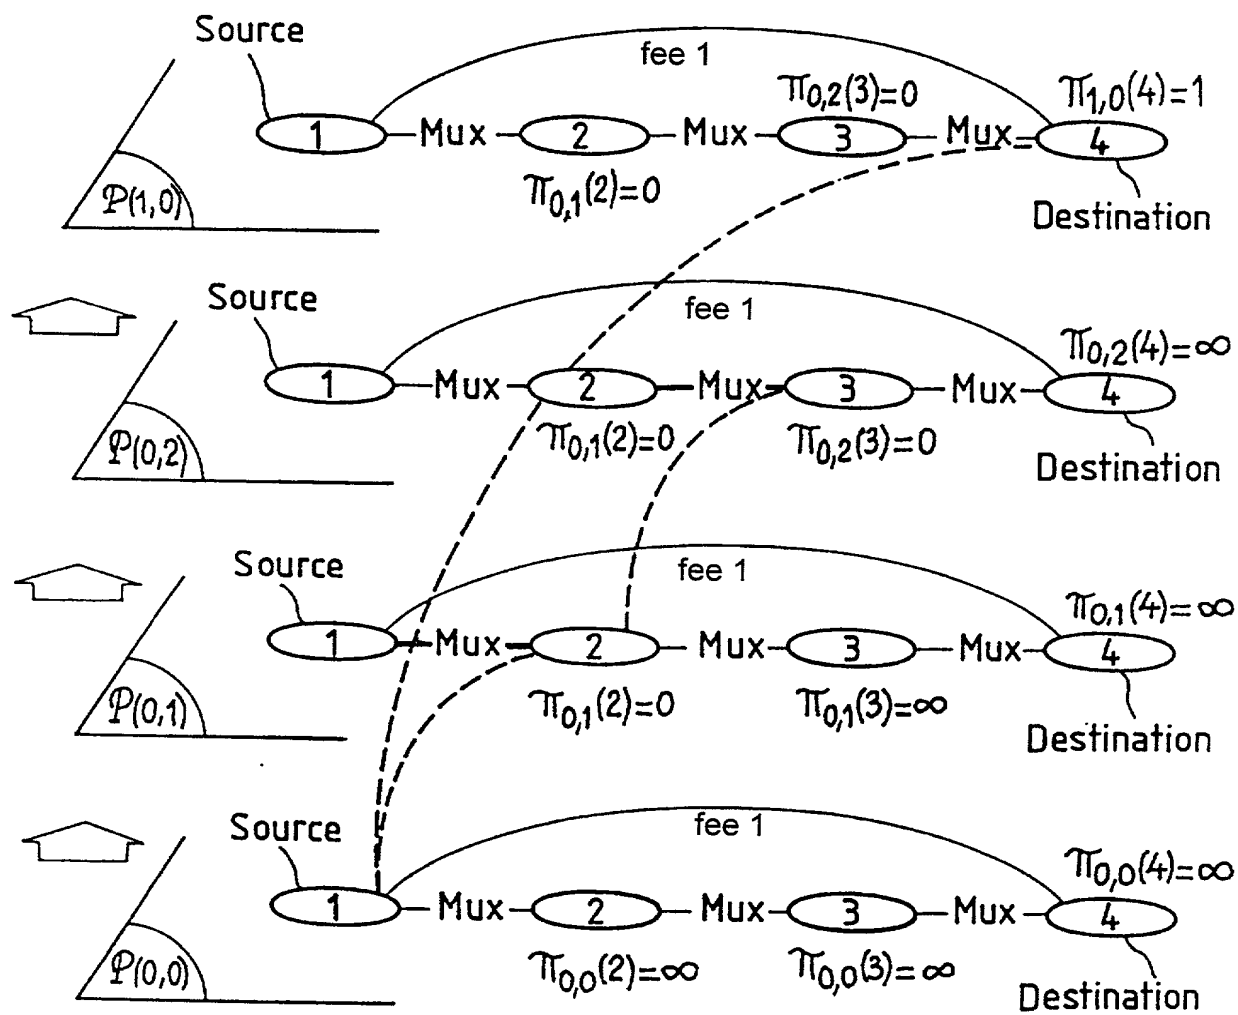FIG_3

Declaration and Power of Attorney for Patent Application

Déclaration et Pouvoirs pour Demande de Brevet

French Language Declaration

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que :

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée

As a below named inventor, I hereby declare that :

Cao Thanh PHAN and Lahcen BENNAI

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention in the specification identified by Docket No.

101356/ES/ESD

et dont la description est fournie ci-joint à moins que la case suivante n'ait été cochée :

☐

a été déposé le _____
sous le numéro de demande des Etats-Unis ou le numéro
de demande international PCT
_____ et modifié le
_____ (le cas échéant)

the specification of which is attached hereto unless the following box is checked :

☐

was filed on _____
as United States Application Number or PCT
International Application Number
_____ and was amended on
_____ (if applicable)

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toutes modification dont il aura été fait référence ci-dessus.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119 (a)-(d) ou § 365 (b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35 § 365(a) du même code, sur toute la demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant à une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior foreign application(s)

Demande(s) de brevet antérieur(s)

98 06765 France

(Number) (Country)
(Numéro) (Pays)

(Number) (Country)
(Numéro) (Pays)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

(Application N°.) (Filing Date)
(N° de demande) (Date de dépôt)

(Application N°.) (Filing Date)
(N° de demande) (Date de dépôt)

Je déclare par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35 § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à ma brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande :

(Application No) (Filing Date)
(No de demande) (Date de dépôt)

(Application No.) (Filing Date)
(No de demande) (Date de dépôt)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby claim foreign priority under Title 35, United States Code §119(a)-(d) or § 365(b) or any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of application on which priority is claimed.

August 06, 1998

(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status)(patented, pending abandoned)
(Statut)(breveté, en cours d'examen, abandonné)

(Status)(patented, pending abandoned)
(Statut)(breveté, en cours d'examen, abandonné)

I hereby declare all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge, that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

French Language Declaration

POUVOIRS : En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques : (mentionner le nom et le numéro d'enregistrement)

POWER OF ATTORNEY : As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

John H Mion Reg No 18 879, Donald E Zinn Reg No 19 046, Thomas J Macpeak Reg No 19 292, Robert J Seas J.R. Reg No 21 092, Darryl Mexic Reg No 23 063, Robert V Sloan Reg No 22 775, Peter D Olexy Reg No 24 513, J Frank Osha Reg No 24 625, Waddell A Biggart Reg No 24 861, Robert G McMarow Reg No 19 093, Louis Gubinsky Reg No 24 835, Niel B Siegel Reg No 25 200, David J Cushing Reg No 28 703, John R Inge Reg No 26 916, Joseph J Ruch, J.R. Reg No 26 577, Sheldon I Landsman Reg No 25 430, Richard C Turner Reg No 29 710, Howard L Bernstein Reg No 25 665, Alan J Kasper Reg No 25 426, Kenneth J Burchfiel Reg No 31 333, Gordon Kit Reg No 30 764, Susan J Mack Reg No 30 951, Frank L Berstein Reg No 31 484, Mark Boland Reg No 32197, William H Mandir Reg No 32 156, Scott M Daniels Reg No 32 562, Brian W Hannon Reg No 32 778, Abraham J Rosner Reg No 33 276, Bruce E Kramer Reg. No 33 725, Paul F Neils Reg No 33 102, and Brett S Sylvester Reg No 32 765



Adresser toute correspondance à :

Send Correspondence to:

SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue N.W. , Suite 800
Washington, D.C. 20037 - 3702

Adresser tout appel téléphonique à :
(nom et numéro de téléphone)

Direct Telephone Calls to :
(name and telephone number)

Nom complet de l'unique ou premier inventeur	Full name of sole or first inventor Cao Thanh PHAN
Signature de l'inventeur Date	Inventor's signature Date  July 12, 1999
Domicile	Residence RUEIL MALMAISON, France
Nationalité	Citizenship FRENCH
Adresse Postale	Post Office Address 25 rue Guy de Maupassant 92500 RUEIL MALMAISON, France
Nom complet du second co-inventeur, le cas échéant	Full name of second inventor, if any Lahcen BENNAI
Signature du second inventeur Date	Second inventor's signature Date  July 12, 1999
Domicile	Residence COLOMBES, France
Nationalité	Citizenship FRENCH
Adresse Postale	Post Office Address 11 rue Jean-Jacques Rousseau 92700 COLOMBES, France

(Supply similar information and signature for third and subsequent

(Fournir les mêmes renseignements et la signature de tout co- joint inventors)
inventeur supplémentaire)